

## DS-KH6320-LE1(B) Video Intercom Network Indoor Station



The KH6 series IP indoor station, with 7-inch touch screen, brings you a more fluent and fit operation. You can also view the live view image of the public area, which helps to check the safety of the area and ensure your security. The device is powered by the standard PoE, and is no need to wire extra power supply, which is easy for installation and deployment.

- 7-inch TFT touch screen with 1024 × 600 resolution
- Plug & Play
- Standard PoE power supply
- Live view of the door station and cameras in public areas
- Support multiple languages

## ▪ Specification

System parameters	
Operation system	Linux
ROM	32 MB
RAM	128 MB
Processor	Embeded high performance processor
Display parameters	
Screen size	7-inch
Operation method	Capacitive touch screen
Type	Colorful TFT
Resolution	1024 × 600
Video parameters	
Lens	/
Resolution	/
FOV	/
Wide dynamic range (WDR)	/
Video compression standard	/
Focal length	/
Audio parameters	
Audio input	1 built-in omnidirectional microphone
Audio compression standard	G.711U, G.711A
Audio output	1 built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Message capacity	200 alarm records 2 MB RAM reserved for events
Linked network camera capacity	16
Linked indoor extensions capacity	16
Linked doorphone capacity	17
Network parameters	
Network protocol	TCP/IP, RTSP
Wi-Fi	/
Bluetooth	/
3G/4G	/
Zigbee	/
Device interfaces	
Alarm input	8
Network interface	1 RJ-45 10/100 Mbps self-adaptive
TAMPER	/
RS-485	/
USB	/
TF card	/



NO.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T: +86-571-8807-5988  
www.hikvision.com

Follow us on social media to get the latest product and solution information.

Hikvision

HikvisionHQ

HikvisionHQ

Hikvision\_Global

Hikvision Corporate Channel

hikvisionhq

Alarm output	/
Lock control	/
<b>General</b>	
Button	/
Installation	Surface mounting, table mounting
Indicator	/
Weight	Net weight: 325 g (0.7 lb) Gross weight: 649 g (1.43 lb)
Protective level	/
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	200 mm × 140 mm × 23.6 mm (7.87" × 5.51" × 0.93")
Battery	/
Power supply	12 VDC, IEEE802.3af, standard PoE
Application environment	Indoor
Power consumption	≤ 6 W
Language	English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Turkish, Vietnamese, Arabic, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Slovak

## ▪ Available Model

DS-KH6320-LE1(B)

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global




Hikvision  
Corporate Channel



hikvisionhq

▪ Dimension

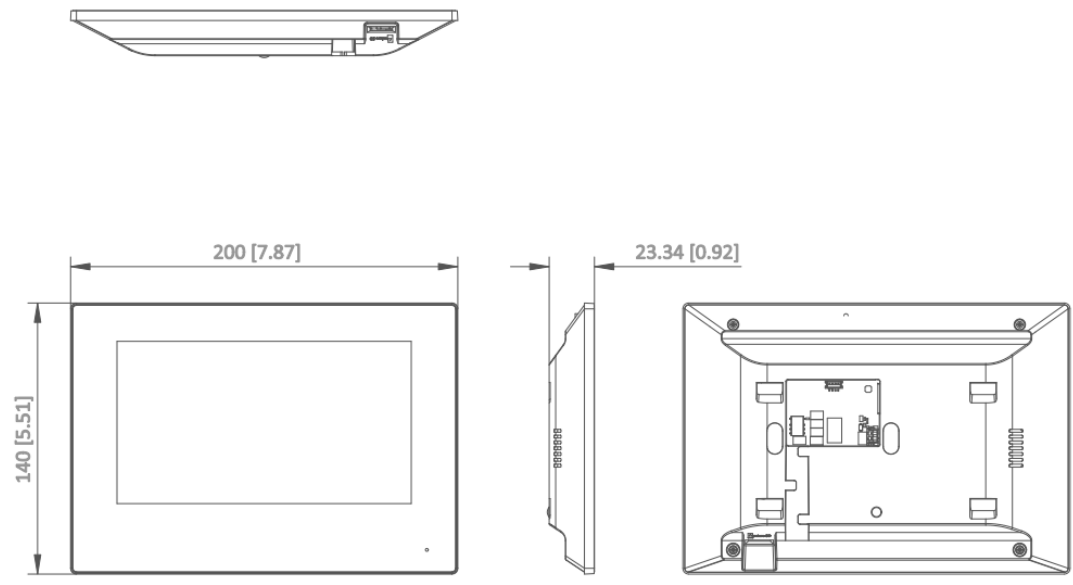

Unit:mm [inch]  
SCALE 1:1

▪ Accessory

▪ Optional

DS-KAW50-1 50W 12V Power Adapter	DS-KABH6320-T Indoor Station Table Bracket	DS-KAW50-1N 50W 12V Power Adapter
		

**Headquarters**  
No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

