

**DS-K1109DKB
Card Reader**

- Supports RS-485 and Wiegand (W26, W34) protocol
- Supports reading DESfire card, Felica card and M1 card
- Supports authentication via card and password
- Supports bluetooth module
- Tamper-proof function

▪ Specification


Interface	
TAMPER	1
RS-485	1 RS-485. Supports OSDP protocol, Baud 9600, 19200, 38400
Wiegand	1
Authentication	
Card type	M1 card, DESfirecard, Felica card
General	
Power supply	12 VDC
Power consumption	With load: ≤ 14 w Without load: ≤ 4 w
Working temperature	-40 °C to 65 °C (-40 °F to 149 °F)
Working humidity	0 to 90% (no condensing)
Protective level	IP65
Dimensions	125 mm × 84.5 mm × 18 mm (4.92" × 3.33" × 0.71")
Installation	Wall mounting
Weight	≤ 1 kg (2.20 lb)
Buzzer	Support

▪ Available Model

DS-K1109DKB(STD)

DS-K1109DKB(NEU)

▪ Dimension

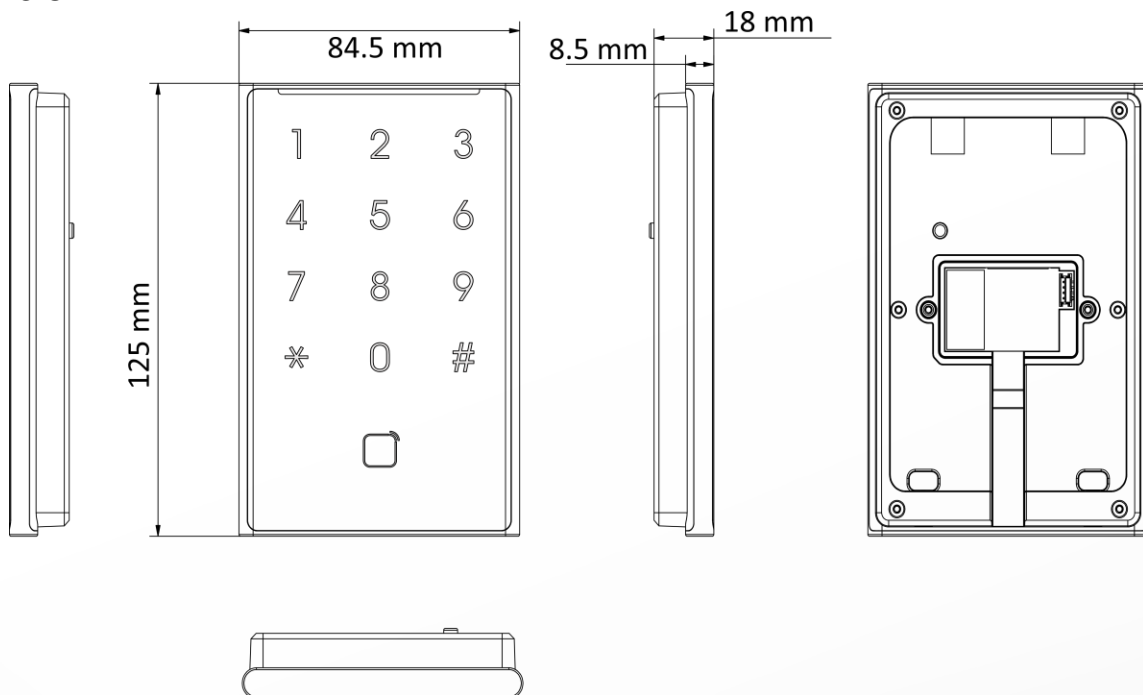

See Far, Go Further



www.hikvision.com
support@hikvision.com

